

自行剪叉式高空作业平台 Electric Scissor Lifts

型号 MODEL

GTJZ06

7.8m工作高度(Working Height)
230kg承载能力(Capacity)

GTJZ08

10m工作高度(Working Height)
230kg承载能力(Capacity)

GTJZ10

12m工作高度(Working Height)
320kg承载能力(Capacity)

GTJZ12

13.8m工作高度(Working Height)
320kg承载能力(Capacity)

特点 Features

标准配置 Standard

- 深坑保护装置 Pothole guards
- 延伸平台 Extension deck
- 无痕轮胎 Solid non-marking tires
- 紧急下降系统 Manual platform lowering valve
- 折叠栏杆 Folding rails
- 故障诊断系统 On-board diagnostic system
- 倾斜保护系统 Tilt level sensor
- 紧急制动开关 Emergency stop
- 手动平台下降阀 Manual platform lowering valve

选配装置 Options

- 连接到平台的AC电源 AC power to platform
- 超重传感器 Overload sensor
- 平台工作灯 Dual flashing beacons
- 连接到平台的导气管 Air line to platform

性能 Performance

可靠性和多功能性 提升效率

Reliability and Versatility, Enhance Efficiency.

轻松通过

紧凑机身可轻松通过单门道和双门道，采用实心无痕轮胎。

Excellent Mobility

Compact body can easily pass through single and double channel doorway, using non-marking solid tire.

特殊场所

低噪音的电动剪叉高空作业平台，可以为诸如办公楼、购物中心、宾馆、学校等噪音敏感环境提供无噪音，方便的操作方式。

Special Locations

Feature of low noise is perfectly suitable for the noise-sensitive environment, such as office buildings, shopping malls, hotels, schools, etc.

紧凑灵活操作


在拥挤的建筑工地、电梯、和狭窄通道内操作灵活。自上而下控制：上、下、左、右、前进、后退、转向等动作，一个人即可轻松自如的完成高空作业。

Compact and Flexible

Can be easily and flexibly operated in crowded working conditions such as Construction Site, elevator, and narrow corridor. Lift-up, lift-down, turning, forward and backward movements can be easily operated by single person.



产品规格	Product Specifications	GTJZ06	GTJZ08	GTJZ10	GTJZ12	
尺寸	Dimensions					
工作高度	Working Height	7.8m	10m	12m	13.8m	
平台高度-A	Platform Height-A	5.8m	8m	10m	11.8m	
贮藏平台高度-B	Platform Height Stowed-B	1.07m	1.23m	1.37m	1.49m	
平台长度-C	Platform Length-C	1.67m	2.27m	2.27m	2.27m	
平台延伸部分尺寸	Platform Extension Length	0.9m	0.9m	0.9m	0.9m	
平台宽度-D	Platform Width-D	0.76m	0.81m	1.17m	1.17m	
总高-E	Overall Height-E	2.18m	2.34m	2.48m	2.59m	
总长-F	Overall Length-F	1.86m	2.42m	2.42m	2.42m	
总宽-G	Overall Width-G	0.76m	0.81m	1.17m	1.17m	
轴距-H	Wheelbase-H	1.31m	1.87m	1.87m	1.87m	
离地间隙-I	Ground Clearance-I	0.1m	0.1m	0.1m	0.1m	
承载能力	Lift Capacity	230kg	230kg	320kg	320kg	
承载能力-延伸平台	Lift Capacity-Extension Deck	113kg	113kg	113kg	113kg	
起升速度	Lift-Up	27s	37s	45s	50s	
下降速度	Lift-Down	22s	32s	35s	38s	
重量	Weight	1415kg	2250kg	2440kg	2860kg	
行驶速度 (收起状态)	DriveSpeed(Platform Lowered)	0-5km/h	0-3.5km/h	0-3.5km/m	0-3.5km/h	
行驶速度 (起升状态)	DriveSpeed(Platform Elevated)	0-0.8km/h	0-0.8km/h	0-0.8km/m	0-0.8km/h	
转向半径-内侧	Turning Radius-inside	0	0	0	0	
转向半径-外侧	Turning Radius-outside	1.64m	2.10m	2.14m	2.14m	
爬坡能力	Gradeability	30%	25%	25%	25%	
允许的最大作业坡度	Maximum Tilt	3°	3°	3°	3°	
无痕实心轮胎	Non-marking solid tires	15×5	15×5	15×5	15×5	
电池	Battery	6v×4/225Ah	6v×4/225Ah	6v×4/225Ah	6v×4/225Ah	
充电系统	Charger	30A 自动定时 30A automatic	30A 自动定时 30A automatic	30A 自动定时 30A automatic	30A 自动定时 30A automatic	

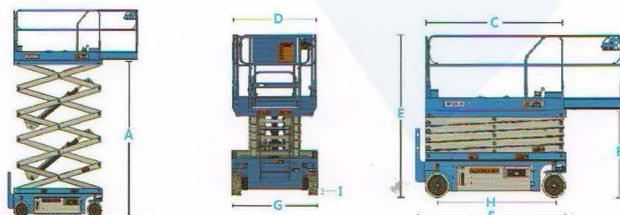

保证—德钩为您提供整机一年的保修服务，因持续的产品改进，我们保留改变规格和(或)配件不提前通知的权利。
 Warranty—Djcranes Lifting backs all products with one(1) full year warranty coverage Due to continuous product improvements, we reserve The right to make specification and/or equipment changes without prior notification.